

DISPLAY Elektronik GmbH

DATA SHEET

BACKLIGHT

DE LP-502-W

Product Specification

Version: 1

20.09.2016

GENERAL SPECIFICATION

MODEL NO. :

DE LP-502-W

CUSTOMER P/N

Version No.	Change Description	Date
0	Original Version	14.09.2016
1	Update Spec	20.09.2016

PREPARED BY: GJJ

DATE: 20.09.2016

APPROVED BY: MH

DATE: 20.09.2016

CONTENTS

1. FEATURES2

2. EXTERNAL DIMENSION (UNIT: MM).....2

3. ELECTRICAL/OPTICAL SPECIFICATIONS.....3

4. ACCEPT QUALITY LEVEL (AQL).3


5. RELIABILITY TEST.....3

1. FEATURES



Backlight Color: White

RoHS: Conformed

2. EXTERNAL DIMENSION (unit: mm)

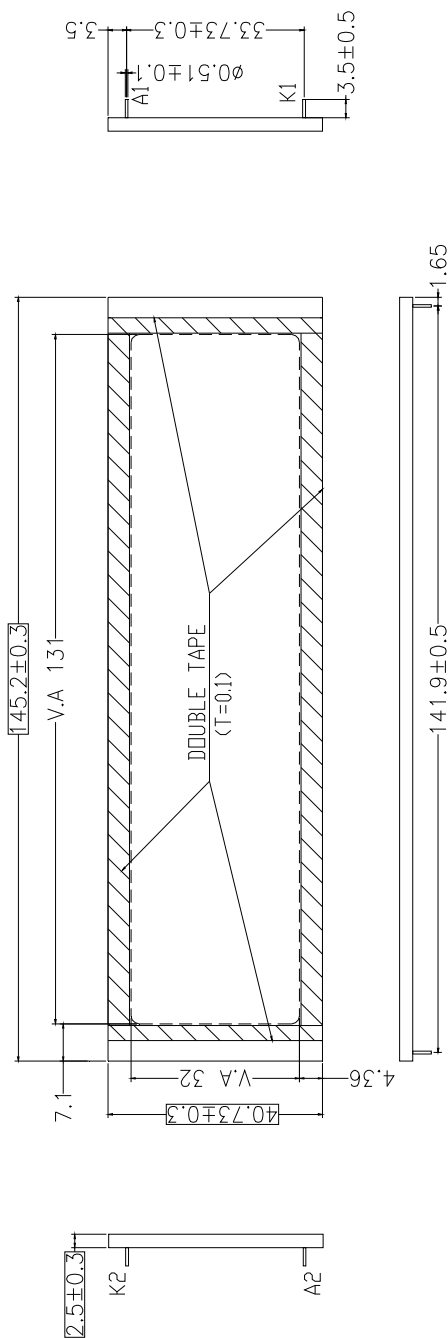

Remarks:
 1. Unmarked tolerance is ±0.3
 2. All materials comply with RoHS
 3. [] ...:critical dimension.
 4. Operation temperature: -20°C to +70°C
 Storage temperature: -40°C to +90°C

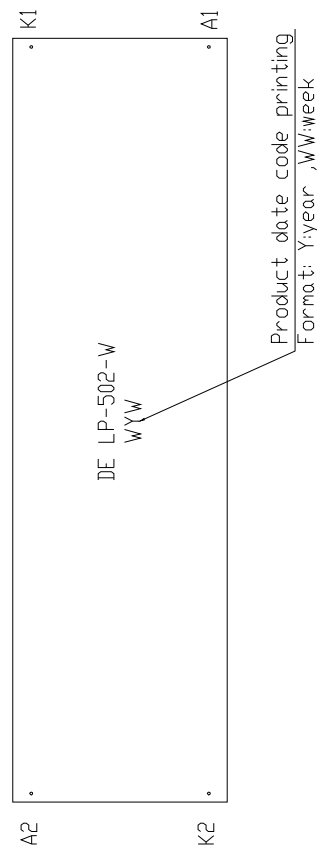

3. ELECTRICAL/OPTICAL SPECIFICATIONS

ELECTRICAL–OPTICAL CHARACTERISTICS

Ta=25°C. Unless specified, The Ambient temperature Ta=25°C

Item	Symbol	min.	typ.	max.	Unit	Condition
Forward Current	Iv	2.6	3.0	3.3	v	If=30*2 mA
Power Dissipation	Pd	–	–	99*2	mW	If=30*2 mA
Luminous Uniformity	DLv	70			%	MIN/MAX*100%
Luminance	Lv	250	400	–	cd/m ²	If=30*2 mA T=25°C
Color Coordinate	x	0.270		0.340		
	y	0.270		0.340		
Lifetime	50000(brightness reduce half)				Hours	

4. ACCEPT QUALITY LEVEL (AQL).

4.1. AQL standard value: Critical defect =0, Major defect=0.65; Minor defect =2.5.

4.2. Inspection Plan: ANSI Z-1.4, Normal Inspection Level II, Single Sampling Plan.

5. RELIABILITY TEST

Test Item	Test Condition
High Temperature Storage	+90°C x 96h
Low temperature Storage	-40°C x 96h
High Temperature Operation	+70°C x 96h
Low Temperature Operation	-20°C x 96h
High Temperature, High Humidity	60°C x 90%RH x 4 Weeks
Thermal Shock	-20°C x 30min → 25°C x 10s → +70°C x 30min x 5 Cycles
Vibration Test	Frequency x Swing x Time 40Hz x 4mm x 4h
Drop Test	Height x Number of drop 1.0m x 6 drops