

**DISPLAY Elektronik GmbH**

# DATA SHEET

**BACKLIGHT**

**DE LP-505-W**

*Product Specification*

*Version: 0*

29.09.2016



**CONTENTS**

**1. FEATURES .....2**

**2. EXTERNAL DIMENSION (UNIT: MM).....2**

**3. ELECTRICAL/OPTICAL SPECIFICATIONS.....3**

**4. ACCEPT QUALITY LEVEL (AQL). ..... FEHLER! TEXTMARKE NICHT DEFINIERT.**


**5. RELIABILITY TEST..... FEHLER! TEXTMARKE NICHT DEFINIERT.**

**1. FEATURES**

Backlight Color: White

RoHS: Conformed

**2. EXTERNAL DIMENSION (unit: mm)**

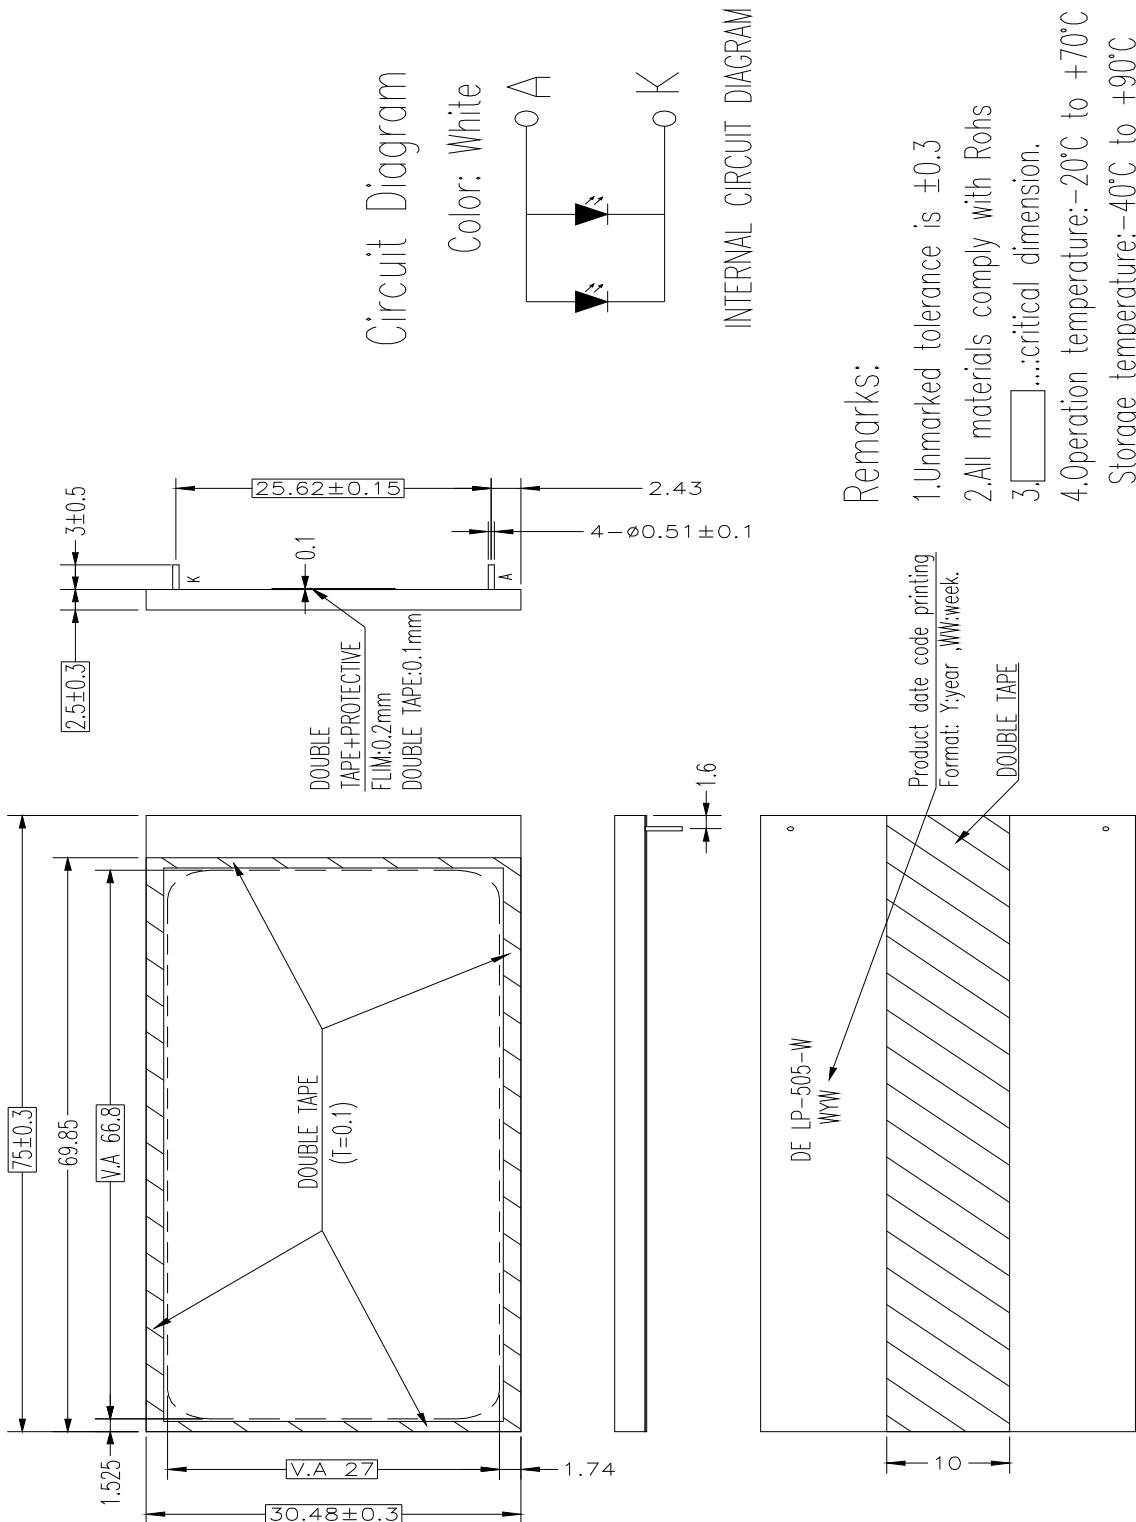

**3. ELECTRICAL/OPTICAL SPECIFICATIONS**

ELECTRICAL–OPTICAL CHARACTERISTICS

Ta=25°C. Unless specified, The Ambient temperature Ta=25°C

Item	Symbol	min.	typ.	max.	Unit	Condition
Forward Current	Iv	2.6	3.0	3.3	v	If= 20*2 mA
Power Dissipation	Pd	-	-	132	mW	If= 20*2 mA
Luminous Uniformity	ΔLv	70			%	MIN/MAX*100%
Luminance	Lv	400	700		cd/m <sup>2</sup>	If=20*2 mA T=25°C
Color Coordinate	x	0.270		0.340		
	y	0.270		0.340		
Lifetime	50000(brightness reduce half)				Hours	

**4. ACCEPT QUALITY LEVEL (AQL).**

4.1. AQL standard value: Critical defect =0, Major defect=0.65; Minor defect =2.5.

4.2. Inspection Plan: ANSI Z-1.4, Normal Inspection Level II, Single Sampling Plan.

**5. RELIABILITY TEST**

Test Item	Test Condition
High Temperature Storage	+90°C x 96h
Low temperature Storage	-40°C x 96h
High Temperature Operation	+70°C x 96h
Low Temperature Operation	-20°C x 96h
High Temperature, High Humidity	60°C x 90%RH x 4 Weeks
Thermal Shock	-20°C x 30min → 25°C x 10s → +70°C x 30min x 5 Cycles
Vibration Test	Frequency x Swing x Time 40Hz x 4mm x 4h
Drop Test	Height x Number of drop 1.0m x 6 drops