



Description : Mercury Free
 Alkaline Button Cell
Chemical System : Zinc/Silver Oxide
Nominal Voltage : 1.55V
Nominal Dimension : $\Phi 6.80\text{mm} \times 2.15\text{mm}$
Applications : Analog watch
Average Weight : 0.35g
Shelf Life : Not less than 90% of the service capacity within first year,
 Not less than 85% of the service capacity with second year storage at $20 \pm 2^\circ\text{C}$, 45-75%RH.
Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.
Close Circuit Voltage : 1.25 V(min.) (load resistor 400Ω at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)
Nominal Service Life (at $20 \pm 2^\circ\text{C}$) : 172hrs (load $15\text{k}\Omega$ cut off 1.2V)
 575hrs (load $50\text{k}\Omega$ cut off 1.2V)
Average Service Capacity ($20 \pm 2^\circ\text{C}$) : 18mAh (load $50\text{k}\Omega$ to cut off 1.2V)

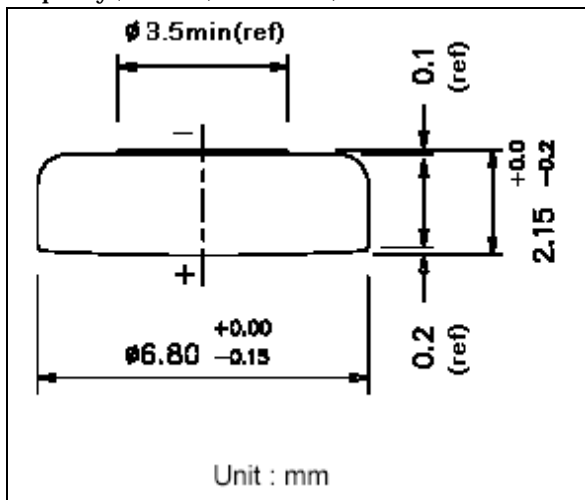

Model No.: **GP364F**

Typical Discharge characteristics at $20 \pm 2^\circ\text{C}$

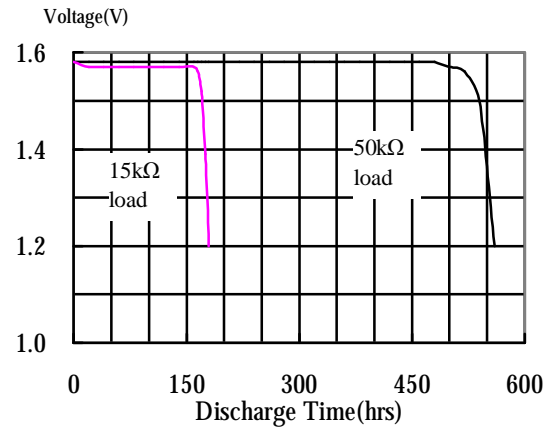

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.