



HITPOINT

TEL:8862-26013311

FAX:8862-26013898

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

Magnetic Buzzer PB-1220PE-12Q

(ROHS)

DATE:2017.05.03



1 . Electrical Characteristics

VER :.5

Oscillation Frequency (Hz)	2048
Operating Voltage (Vp-p)	9.0 ~ 15
Rated Voltage (Vp-p)	12
Current Consumption (mA/max.)	65 at Rated Voltage
Sound Pressure Level (dB/min.)	90 at 10cm at Rated Voltage
Coil Resistance (Ω)	115 \pm 10
Operating Temperature ($^{\circ}\text{C}$)	-20 ~ +70
Storage Temperature ($^{\circ}\text{C}$)	-30 ~ +80
Condition by wave ($^{\circ}\text{C}$)	260 \pm 5 $^{\circ}\text{C}$ / within 5sec
Condition by hand ($^{\circ}\text{C}$)	350 \pm 20 $^{\circ}\text{C}$ / within 5sec

PS : Vp-p=1/2duty , square wave


2 . Typical Frequency Response Curve

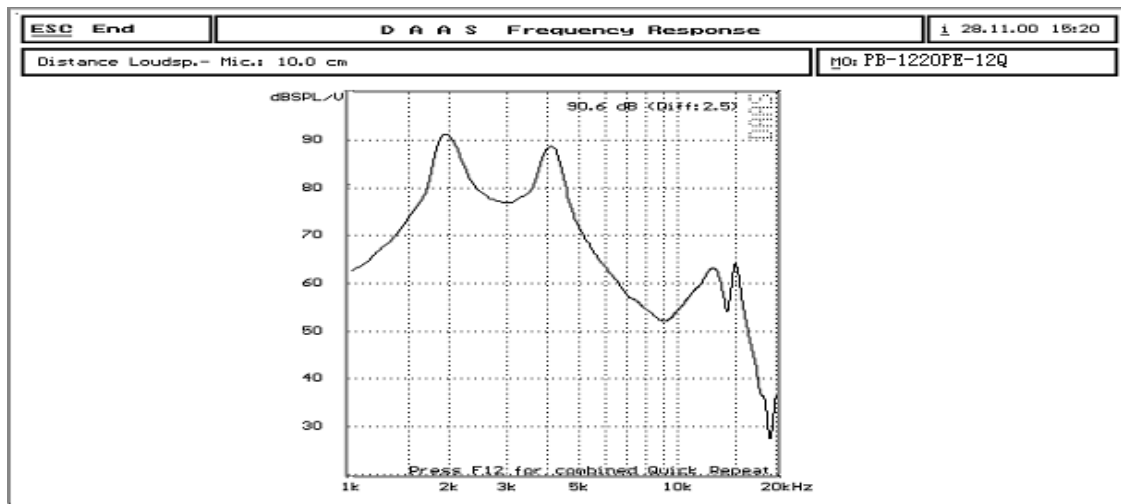

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

3 . Dimensions and Material

3-1 Shape

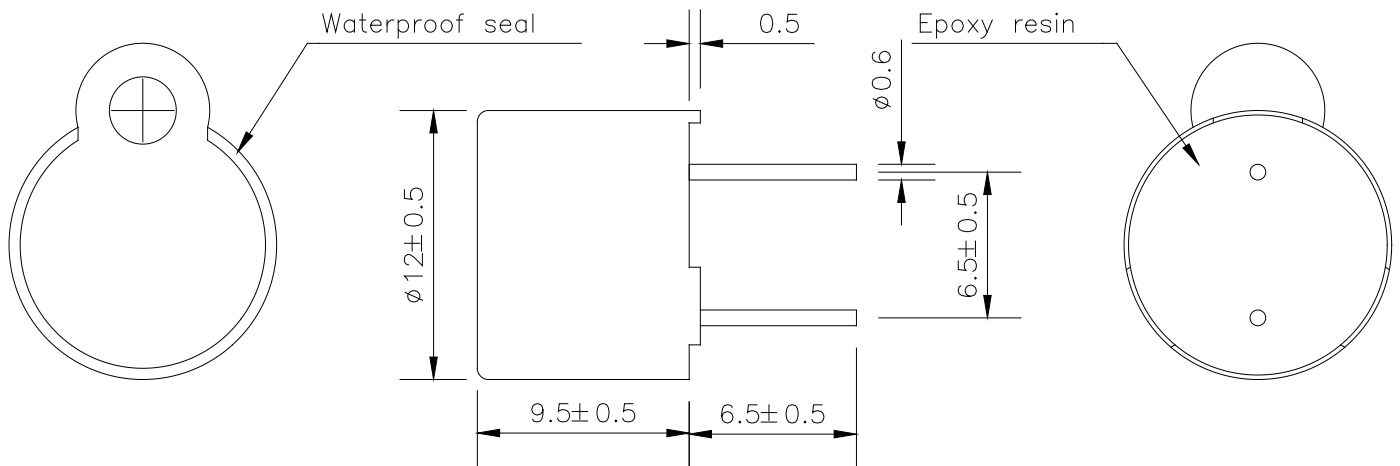


Unit : mm


3-2 Material

Housing	PPO plastic resin (Color : Black)
Leading Pin	Tin Plated Brass
Weight (Gram)	1.6

4 . Recommend Driving Circuit

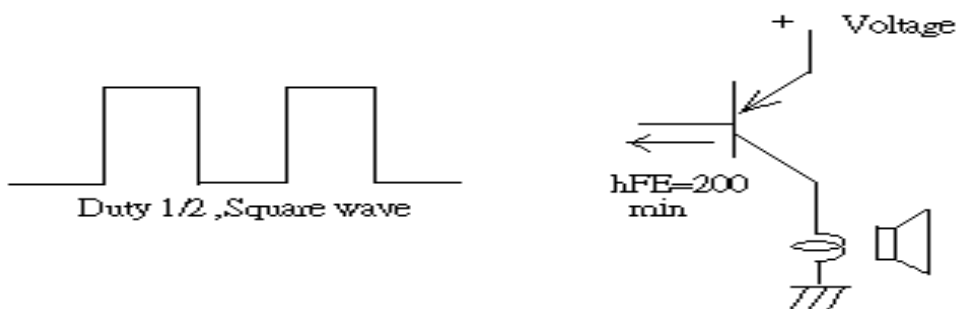

The base current I_b should high enough so that it saturates the collector current of the transistor with the CB load.




5. TESTING METHOD

• *Standard Measurement conditions*

Temperature:25±2 °C Humidity:45-60%

• *Acoustic Characteristics*

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below.

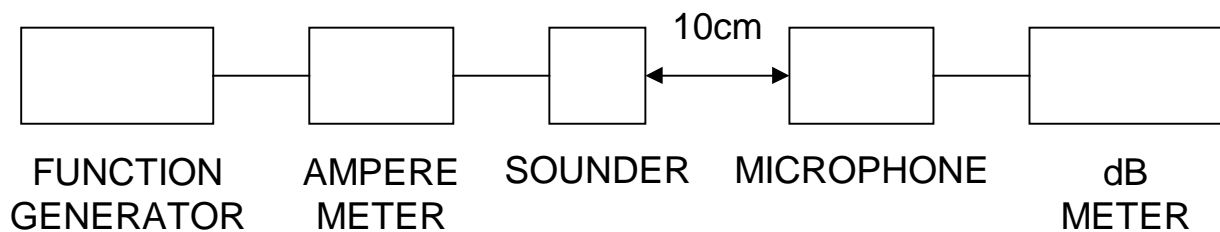

NO.4 Lane 505, Zhongzheng Rd., Linkou Shiang, Taipei, Taiwan 24445 . R.O.C

6. RELIABILITY

ITEMS	METHOD OF TEST AND MEASUREMENTS	PERFORMANCE
<i>Coldness withstanding</i>	<i>After 98 hours of being exposed to -30℃ environment, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Hotness withstanding</i>	<i>After 98 hours of being exposed to +80℃ environment, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Humidity withstanding</i>	<i>After 98 hours of being exposed to 40℃ 95%RH environment in actual operation, should be returned to normal environment for 2 hours, then re-proceed to test.</i>	<i>No abnormality shall exist</i>
<i>Durability</i>	<i>Testing after 1,000 hours actual continuous operation. (at standard measurement conditions)</i>	<i>No abnormality shall exist</i>
<i>Drop withstanding</i>	<i>A natural drop from 75cm high down to the ground.</i>	<i>No abnormality shall exist</i>
<i>Vibration withstanding</i>	<i>Vibration of 2,000 cycles per minute, 2mm amplitude, applied in X, Y and Z directions for 30 minutes each.</i>	<i>No abnormality shall exist</i>

7. PACKAGE METHOD

< 1 > 100pcs per box , Total 40 boxes per carton , total 4000pcs carton;

Volume: L*W*H=520*335*290mm

< 2 > N . W . : 6.4KGS ; G . W . : 7.6KGS ;

< 3 > RoHS Mark: